

EN

- +48MM
- +36MM
- +24MM
- +12MM



SPACCR[®]
CAR LIFTING SYSTEM



HIGH. HIGHER. SPACCCER®.
THE PERFECT SYSTEM

SPACCCER® LIFTING-SYSTEM

The SPACCCER® lifting system provides an easy and individual method for lifting your vehicle by up to 48 mm by the application of max. 4 SPACCCER or up to 60 mm by using 4 SPACCCER with a rubber profile.

A single SPACCCER® will lift your car up to 12 mm at one wheel, with a rubber profile up to 3mm. You can lift the front axle, the rear axle, or front and rear axle of your vehicle.

FIELDS OF APPLICATION

- Increased clearance
- Improved entry comfort
- Especially suitable for vehicles often used for towing trailers
- More sportive off-road look
- Also for vehicles which have been lowered
- Level control for permanent loads

BENEFITS



INCREASED CLEARANCE
12 , 24 , 36 or 48mm, with rubber profiles up to 60mm lifting



100% ACCURACY OF FIT
customized models based on chassis number



HIGH-QUALITY PRODUCT
„Made in Germany“



12 mm
3 mm



12 mm
3 mm



12 mm
3 mm



12 mm
3 mm



48 mm SPACCCER®
max. 4 SPACCCER®
stacked on top of
each other
12 mm SPACCCER®
RUBBERPROFILE

MAXIMUM LIFTING
ca. 60 mm
with every vehicle type

MATERIAL AND PRODUCTION

HIGH-STRENGTH AND TESTED



SPACER® (12mm)



SPACER® with rubber profile (15mm)
12mm + 3mm = 15mm

MATERIAL

A SPACER® is a high-strength special aluminum coil ring. Based on the **chassis number** this ring is **custom-made** to fit the individual coil spring of your vehicle.


An optional rubber profile can be inserted in the lower SPACER® groove which will lift your vehicle another 3 mm per SPACER®.

Since SPACERs® are made from high-grade special aluminum and are subjected to compression forces only they are practically non-wearing.

PRODUCTION

Our products have to pass strict tests during the production, to be sure to measure up with the requirements of the market in Europe or to exceed them.

Every SPACER is delivered including a quality certificate, installation instruction and a TÜV-testreport!

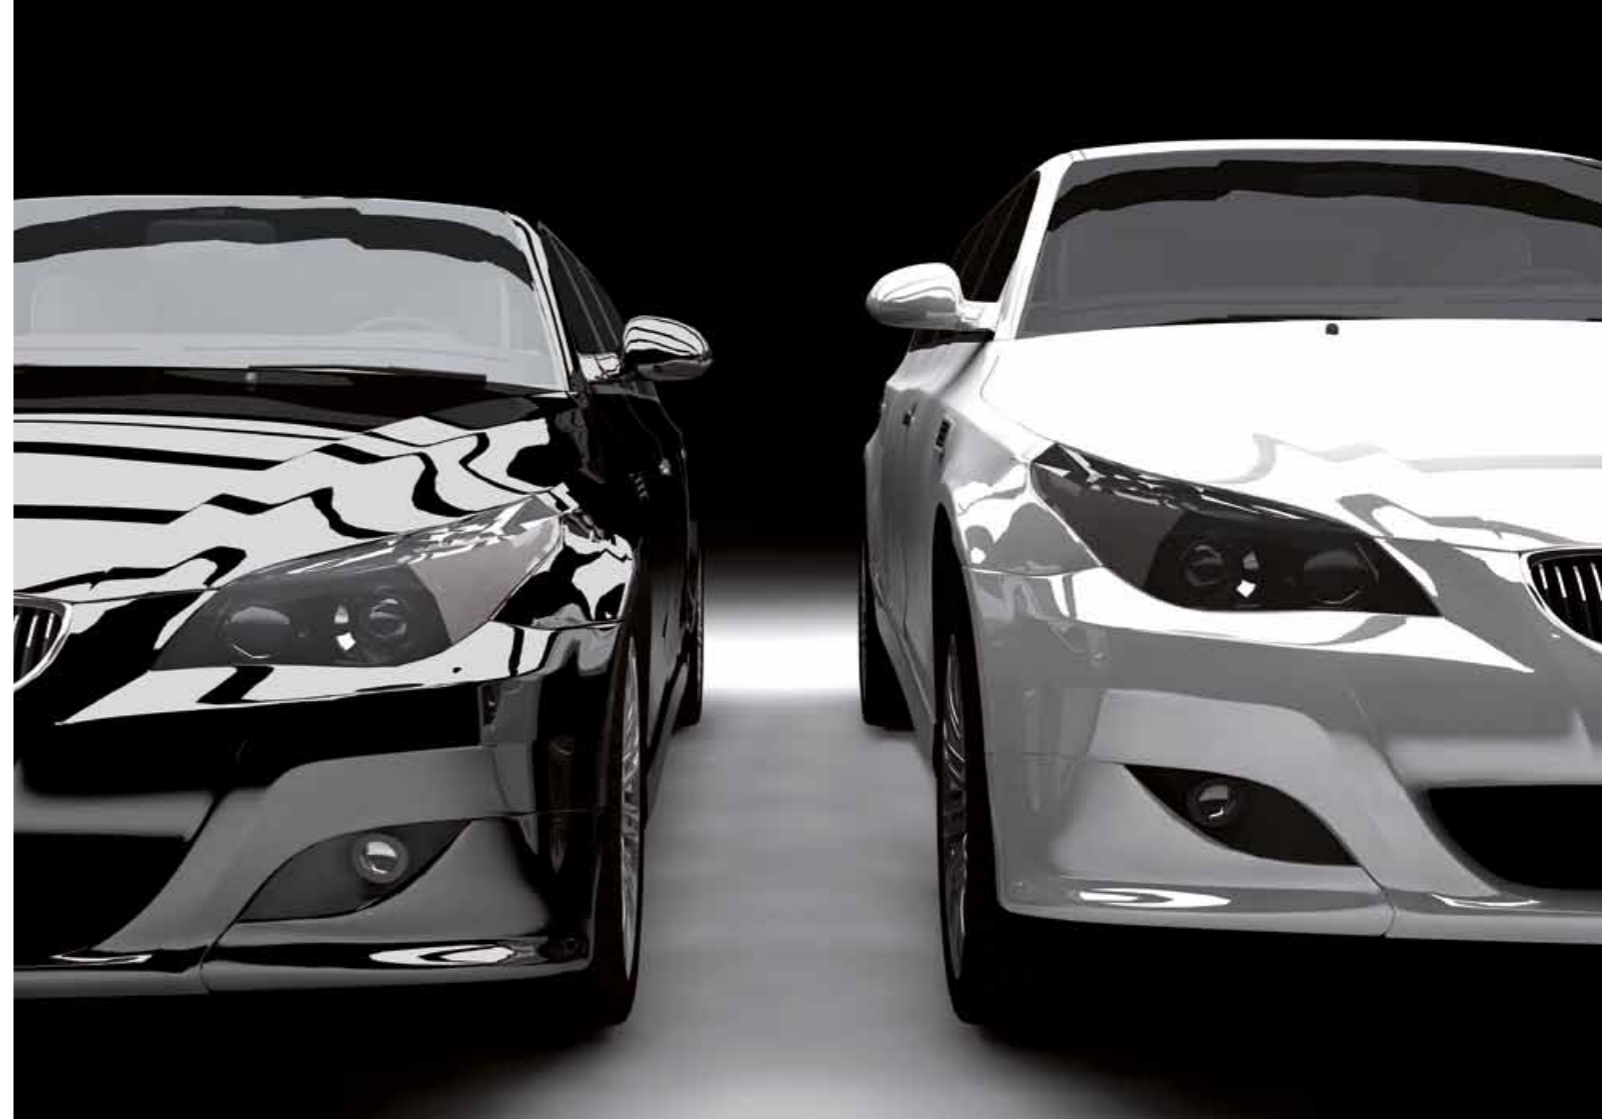




SPACCR® FOR ALL
MAKES AND MODELS

SPACCR® – INVARIABLY FLEXIBLE

Thanks to individual special assembly for the particular vehicle type the SPACCR Higher Lifting Set is available for all makes and models. We ship worldwide to 150 countries.

It doesn't matter if the spring and the shock absorber are being parted or combined (MacPherson) in their chassis.

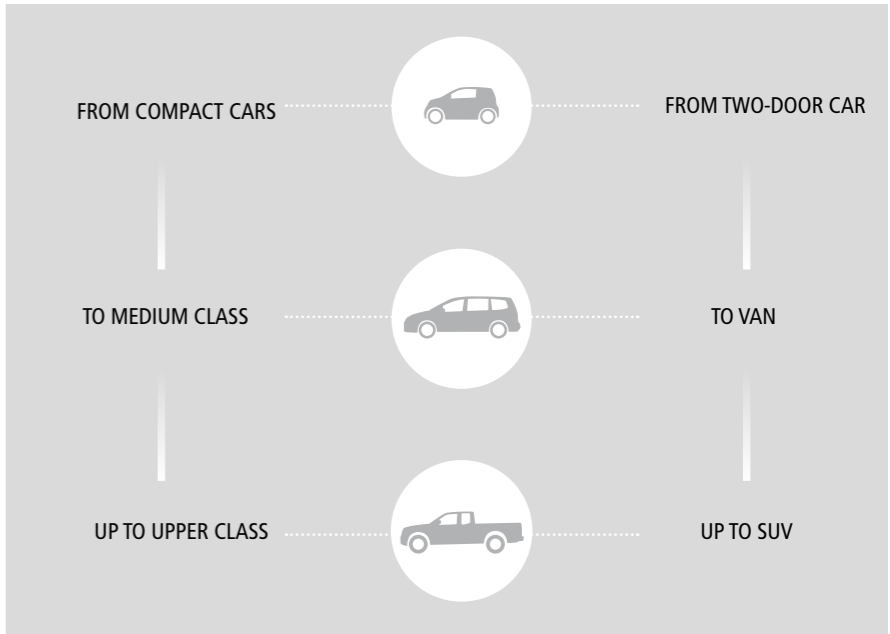

INSTALLATION

IN 3 EASY STEPS



- Lift vehicle with Jack or lifting platform
- Remove wheel
- Remove spring or simply compress spring with spring compressor if feasible



Place SPACCR® above (or underneath) spring




Install coil spring with mounted SPACCR® system or release spring compressor

Done!


Prior to installing the SPACCR® system it has to be ensured that the remaining suspension spring travel between extension and compression must be at least 4 cm with the SPACCR® system installed. For instructions visit: www.spaccer.com

INSTALLATION

SKETCH

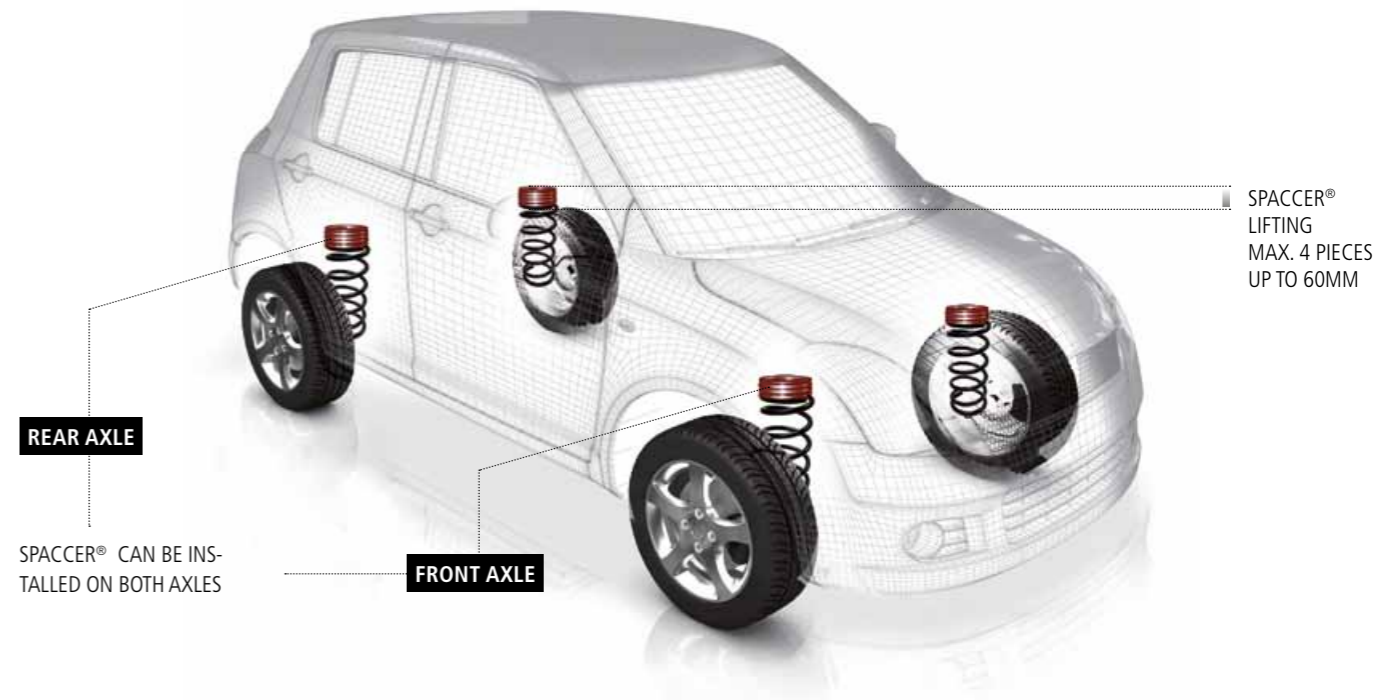

You can remove the Spaccer system at any time without any restrictions. For additional application examples, installation instructions and video instructions please visit www.spaccer.de.

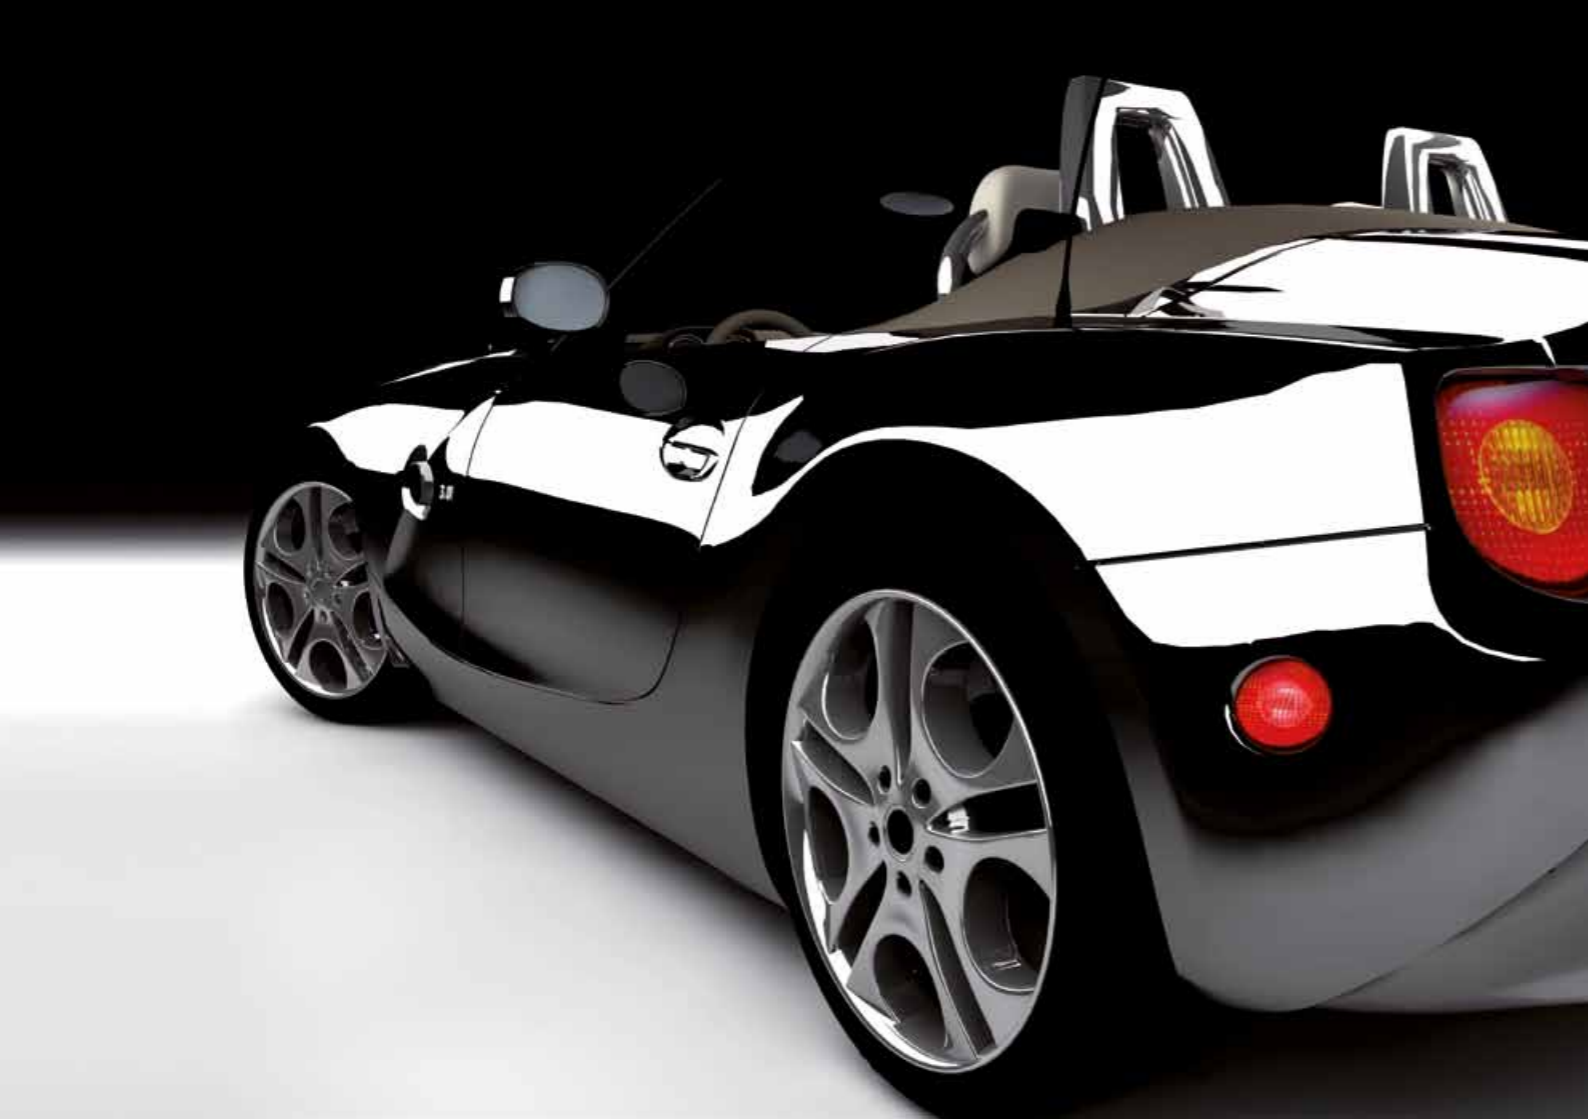

ANY QUESTIONS?

More information, instruction videos and installation examples on our homepage www.spaccer.com or contact us under: **0049 7303/2222**

ORDER

You can order SPACCR and accessories here:

- Online: www.spaccer.com
- Telefon: 0049 7303 / 2222
- Specialised factory
- Fax: 0049 7303 / 2002
(order form unter www.spaccer.com)
- Retailer (siehe www.spaccer.com)



Using the QR-Code you are easily directed to the online calculation.



SPACCR® holds the
„World P.C.T. Patent“




Every SPACCR is delivered
including the TÜV testreport!

SPACCR® LIFTING SYSTEM

Industriestraße 27
89257 Illertissen
Germany

Phone: 0049 7303/2222
Fax: 0049 7303/2002

E-Mail: info@spaccer.com
Web: www.spaccer.com



SPACCR® do business in more than 150 countries worldwide: www.spaccer.com